




1991-2003 SPORTSTER SKID PLATE # 11-1017 & 11-1018 INSTALLATION INSTRUCTIONS

OK, sure, as a rule the factory never intended you to ride your Harley on dirt. That's probably why it didn't come with a Skid Plate. But who plays by the rules anyways? Whether you're building a Scrambler, Tracker or just want a little extra protection for the inevitable curb jump or wheelie in your future, Firebrand has built a Skid Plate especially for you.

Laser cut from 3/32" thick aluminum and hand finished for precise fitment, the Firebrand Skid Plate provides the most engine case and frame rail coverage, while blending perfectly to the contours of your bike. Available in brushed aluminum or black powder coat finishes, the Firebrand Skid Plate is hand crafted with pride in Anaheim, California by people who ride motorcycles. Please follow the installation instructions below and if you have any questions, please call our technical support line Toll Free at 844-FIREONE (347-3663). Attention installer (if other than owner), please forward this instruction sheet to the owner of this product. These instructions contain valuable information to the end user.

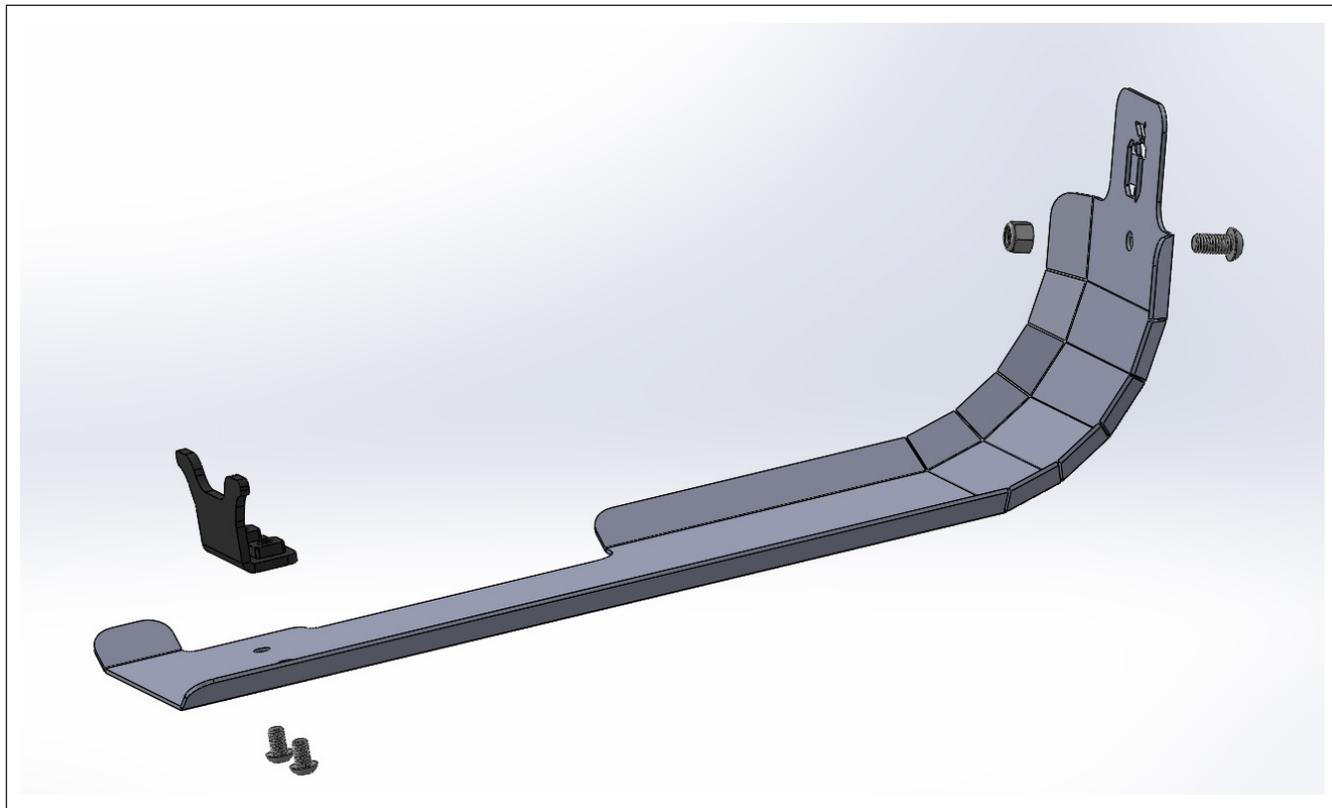

DISCLAIMER

Firebrand Skid Plates are warrantied against defects in material and workmanship for a period of 1 year from the date of purchase from an authorized dealer. This warranty is limited to the repair or replacement of a product proven to be defective from normal use. Firebrand Skid Plates are designed to fit and operate on OEM motorcycles. This warranty does not cover any product subject to abuse, misuse, improper installation or modification. Be sure to follow proper installation instructions.

1. Insert the mount strap between the frame rails behind the back of the engine. By twisting it sideways it is possible to get it to seat with an arm over each frame rail (Take care not to trap any wires, cables or hoses between the strap and the frame rails).
2. Loosely install the skid plate at the front of the chassis using the supplied nylock nut and bolt.
3. Align the Mount strap with the skid plate and insert bolts through from lower side.
4. Beginning with the front bolt, tighten all the hardware.

IMPORTANT, PLEASE READ!

We highly recommend the use of thread locking compound on all hardware during installation.

TOOLS REQUIRED

- 9/16" COMBINATION WRENCH
- 3/16" ALLEN WRENCH
- 7/32" ALLEN WRENCH

firebrandTM
ANYTHING BUT NEUTRAL



REV. A_7/16